

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: G01N 25/22

(11) International Publication Number:

WO 99/19717

A1 (43) International Publication Date:

22 April 1999 (22.04.99)

(21) International Application Number:

PCT/US98/21869

(22) International Filing Date:

15 October 1998 (15.10.98)

(30) Priority Data:

08/950,403

15 October 1997 (15.10.97)

US

(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application

US

08/950,403 (CIP)

Filed on

15 October 1997 (15.10.97)

(71) Applicant (for all designated States except US): ACLARA BIOSCIENCES, INC. [US/US]; 3906 Trust Way, Hayward, CA 94545 (US).

(72) Inventors; and


- (75) Inventors/Applicants (for US only): BJORNSON, Torleif, Ove [SE/US]; 7030 Daniel Court, Gilroy, CA 9502 (US). SHEA, Laurence, R. [US/US]; 881 Cherry Creek Circle, San Jose, CA 95126 (US).
- (74) Agents: TRECARTIN, Richard, F. et al.; Flehr, Hohbach, Test, Albritton & Herbert LLP, Suite 3400, 4 Embarcadero Center, San Francisco, CA 94111-4187 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, IP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: LAMINATE MICROSTRUCTURE DEVICE AND METHOD FOR MAKING SAME

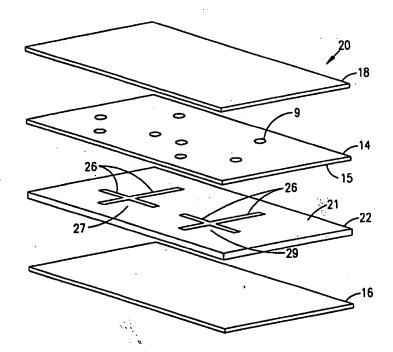

(57) Abstract

A continuous form microstructure array device (20) is constructed as a flexible elongate film laminate containing microstructure arrays (26) arranged serially along the laminate. The laminate can be continuously drawn from a roll, passed through a processing and analysis device and rerolled or stacked for storage.